

CMX: Proximity Unlock no longer needs to be toggled and will remain on.

RF Port Option

The EZGO II antenna is compatible with any AM/AP remote, so the user can have an AM/AP companion 1, or 4 button remote in this combination.

NOTE: RFID remote seems to respond to proximity better when programmed in the first RF spot.

Brown UART Port Option (no feature change required)

(Requires the included RF to UART adapter)

Remote programming sequence will be the same.

It can be used in conjunction with a remote kit programmed to the RF port.
(long range remote or 2 way remote)


Passive Arming/Locking + RFID

Will passively arm/lock once the remote is no longer detected by the antenna. If the remote remains within range of the antenna for at least 5 minutes the passive arming function will be temporarily stopped. Any new incoming commands, open zones, or ignition on will restart the passive arming/locking process.

CM2500 supports the passive arming/locking feature 1-08 option 4.

The EZGO will be able to toggle passive arming on/off using the “tap + hold for 2.5” button press.
(it's off by default)

CMX Firmware version 1.30 (or newer) REQUIRED

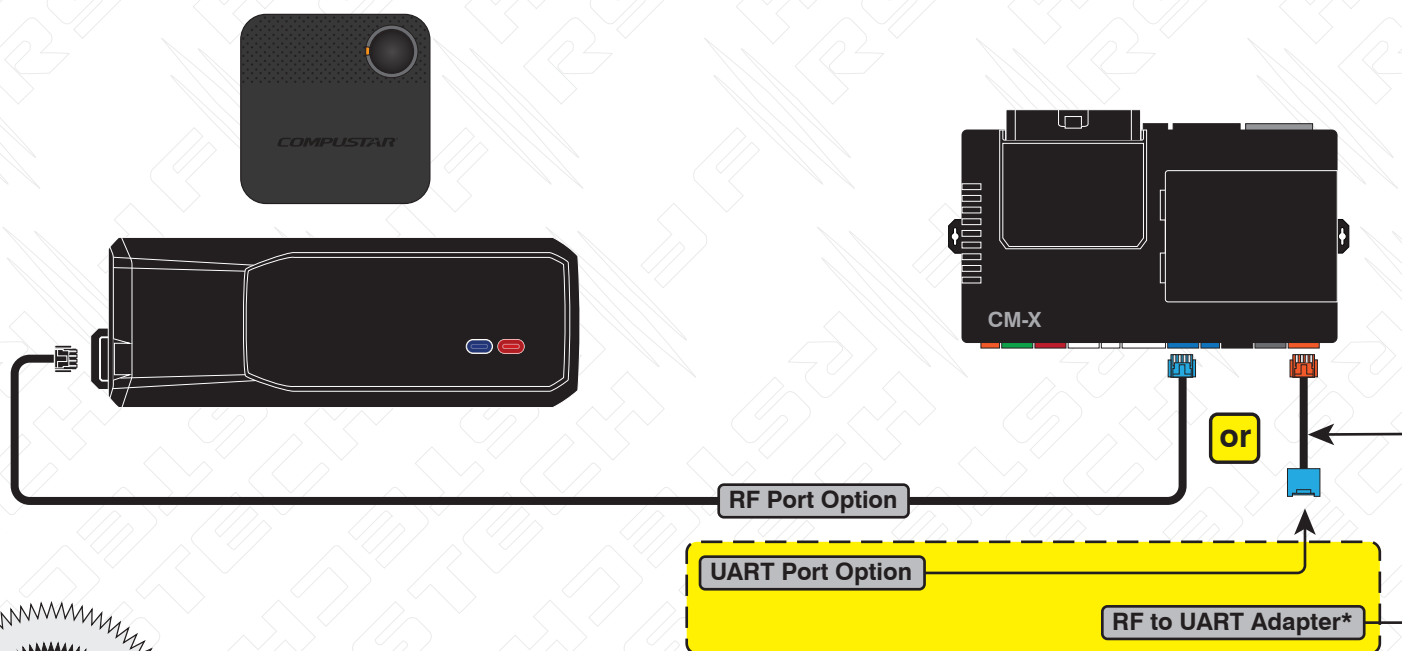

DC3:


RF Port Option

The EZGO II antenna is compatible with any AM/AP remote, so the user can have an AM/AP companion 1, or 4 button remote (except the 900R) in this combination.

NOTE: RFID remote seems to respond to proximity better when programmed in the first RF spot.

- * The proximity unlock function is ENABLED by default, once the option is selected during the module flashing and configuration.
- * The EZGO II will only be able to toggle the passive arming/proximity locking function only. Tap then hold for 3 seconds to turn passive on or off.
- * In order to use EZGO2 the 'FTX Passive Locking' option in the DC3 RFID menu must be selected when flashing.
- * 'Passive Arming' (Menu 3, Option 4) is not required and will interfere with the proximity locking if selected, so do not activate this feature.

DC3 RS Core Firmware Compatible as of 4/1/2023

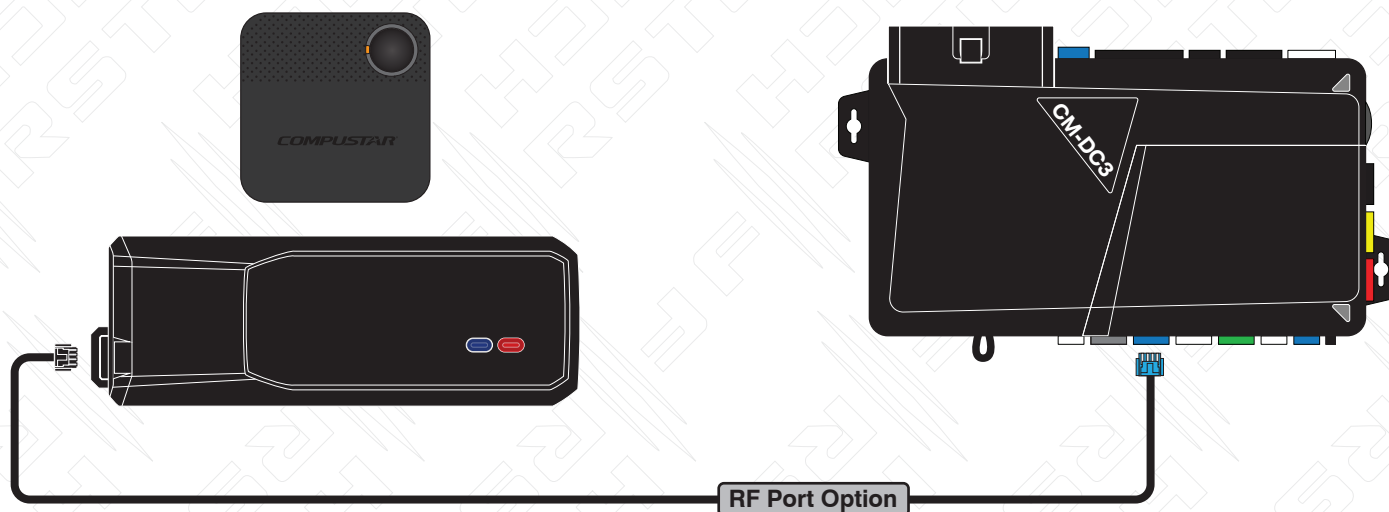

RF Port Option

NOTE: RFID remote seems to respond to proximity better when programmed in the first RF spot.

(Requires the included RF to UART adapter)

It can be used in conjunction with a remote kit programmed to the RF port.

If a user wants to keep their long range remote and Drone, they will need to update the CM2500A to F/W v1.17. This will allow the tech to change feature 3-07 to option 2 (Drone) and connect Drone to the black UART port. ●

Will passively arm/lock once the remote is no longer detected by the antenna. If the remote remains within range of the antenna for at least 5 minutes the passive arming function will be temporarily stopped. Any new incoming commands, open zones, or ignition on will restart the passive arming/locking process.

The EZGO will be able to toggle passive arming on/off using the “tap + hold for 2.5” button press. **(it's off by default)**

See note above:
Gray UART Port Option
(long range remotes and Drone)

CM-2500

RF Port Option

or

UART Port Option

Feature 4-11, Option 2 (REQUIRED)

RF to UART Adapter*

***Yeah, we know the adapter isn't this long. Let's just pretend, okay?**



CM900 AS: Proximity Unlock no longer needs to be toggled and will remain on.**RF Port Option**

The EZGO II antenna is compatible with any AM/AP remote, so the user can have an AM/AP companion 1, or 4 button remote in this combination.

NOTE: RFID remote seems to respond to proximity better when programmed in the first RF spot.

Gray UART Port Option (must use feature 4-11 option 2)

(Requires the included RF to UART adapter)

Remote programming sequence will be the same.

It can be used in conjunction with a remote kit programmed to the RF port.
(long range remote or 2 way remote)

If a user wants to keep their long range remote and Drone, they will need to upgrade to a CMX.
(The Black UART port does not support Drone)


Passive Arming/Locking + RFID

Will passively arm/lock once the remote is no longer detected by the antenna. If the remote remains within range of the antenna for at least 5 minutes the passive arming function will be temporarily stopped. Any new incoming commands, open zones, or ignition on will restart the passive arming/locking process.

CM900AS supports the passive arming/locking feature 1-08 option 4.

The EZGO will be able to toggle passive arming on/off using the "tap + hold for 2.5" button press.
(it's off by default)

CM900AS Firmware version 1.28 (or newer) REQUIRED

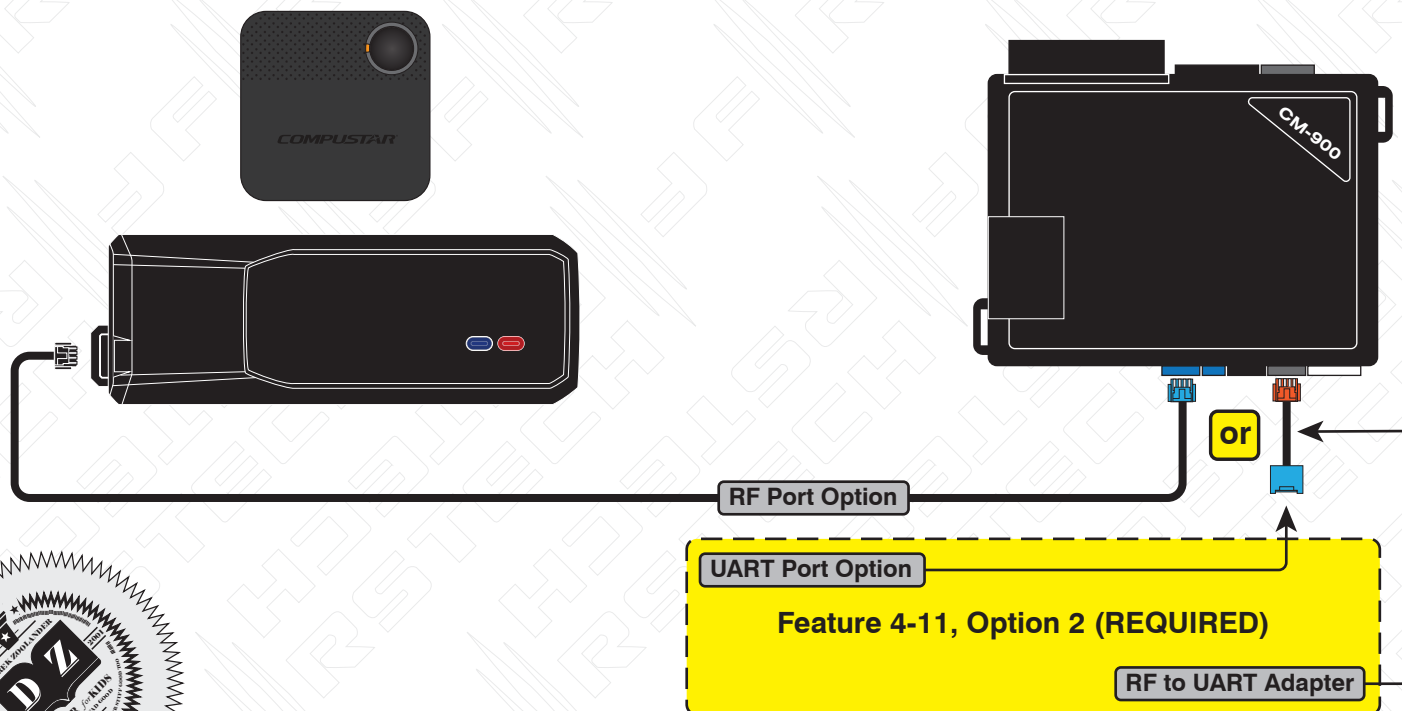

CM900 S: Proximity Unlock no longer needs to be toggled and will remain on.**RF Port Option**

The EZGO II antenna is compatible with any AM/AP remote, so the user can have an AM/AP companion 1, or 4 button remote in this combination.

NOTE: RFID remote seems to respond to proximity better when programmed in the first RF spot.

Gray UART Port Option (must use feature 4-11 option 2)

(Requires the included RF to UART adapter)

Remote programming sequence will be the same.

It can be used in conjunction with a remote kit programmed to the RF port.
(long range remote or 2 way remote)

If a user wants to keep their long range remote and Drone, they will need to upgrade to a CMX.
(The Black UART port does not support Drone)

Passive Arming/Locking + RFID: NOT SUPPORTED**CM900AS Firmware version 1.28 (or newer) REQUIRED**