

# AUTO EASE

## POWER LIFT GATE

MANUAL



For  
Nissan Rogue T33

This power lift gate kit for Nissan Rogue T33 support automatic trunk open/close control by using 1) original remote control 2) dashboard/front button 3) tailgate/rear button 4) Foot sensor – optional









## NOTICE

1. Check parts & quantity in the accessories table. Must use the brackets/screws provided by us if not stated
2. Shut down engine before installation. Product must be installed by qualified installers
3. Strut assembly contains high pressure part, self-disassembling the strut is prohibited
4. Make protections on dashboard, plastic trims, and metal surfaces, to prevent scratches during installation
5. Secure all the cables/wires in vehicle to prevent connection getting loose in driving
6. Installation time depends on many factors, usually it will take around 3 hours, please follow manual patiently





## ATTENTION

1. This liftgate kit is designed for standard factory rear door panel, modifications with extra weight may not be supported
2. Bench-test is forbidden, liftgate kit must be installed in vehicle before powered testing
3. Once power struts are installed, manually & gently lift rear door up/down to make sure they can be moved smoothly, and without interference with trunk & door panels
4. Do not insert power plug to control box until whole installation procedures are completed
5. Make sure there is backlight on our rear button once power is connected
6. Initialize system after installation - manually lift tailgate to desired height, keep on pressing our rear button 3 second until a beep is heard, click our rear button to close, when door is fully closed with a beep, it means the system is initialized and ready for use

PART LIST

			
Power Strut x2	Control Box x1	Power Striker x1	Power Cable x1
			
Power Striker Cable x1	Lock Adapter x1	Button x2	Bracket x2

TOOLS (not included)

			
Trim Remover x1	Spanner x1	Cable Route Puller x1	Electric Tape x1


REMARK: pictures on above are for reference only, they may not up to date to show actual parts included. Autoease keep the right to update product appearance & designs without notification.

Make protections on dashboard, door panels, trunk panels and metal surfaces, to avoid scratches during installation.


The installation steps are based on left hand drive

IGNORE blue wire in rear button cable

# SCHEME

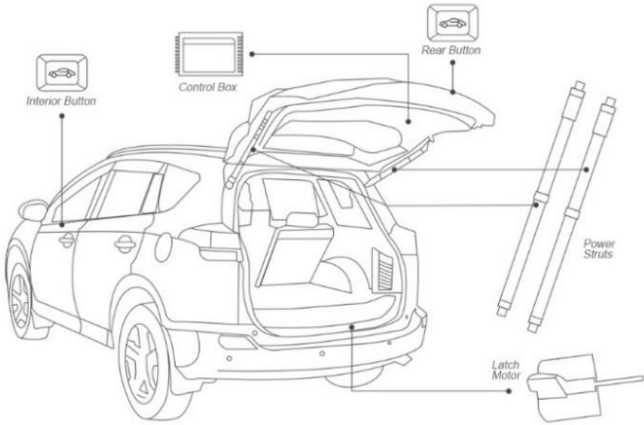

# CONTROL BOX

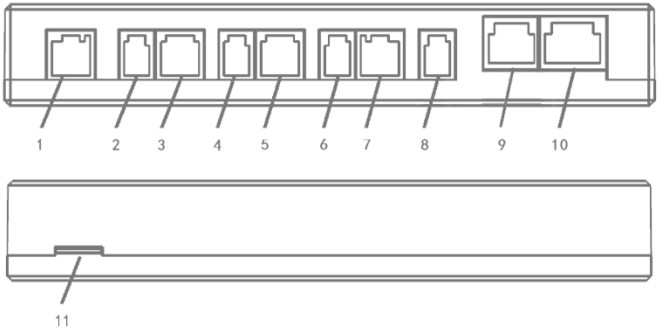

- 1 Power
- 2/3 Left Strut
- 4/5 Right Strut
- 6/7 Power Striker
- 8 Lock Adapter
- 9 Front Button
- 10 Rear Button
- 11 MicroSD Slot

# INSTALLATION STEPS

Vehicle's rear view




1. Remove original hatch panels with a plastic wrench, remove door handle first



2. Loosen original gas strut clips by using a slotted screw driver, then pull gas struts out gently. Be aware factory door panel is very heavy, use an assistance to hold the door when removing the both gas struts



3. Replace original trunk brackets to ours, fix with original screws. Install our power struts, cable end at door

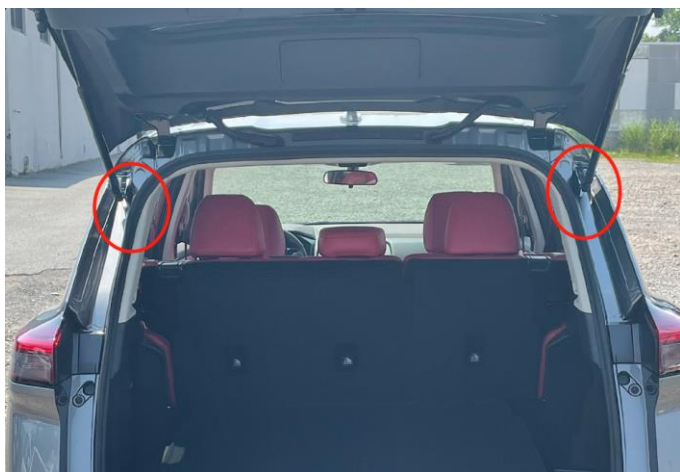

4. Power strut installed



Drill a hole in door panel to route strut cable by using provided drill bit




5. Remove original trunk panels



6. Replace original latch striker to ours for soft close, fix with original screws



Place power striker motor in left side of trunk, fix with striker or string

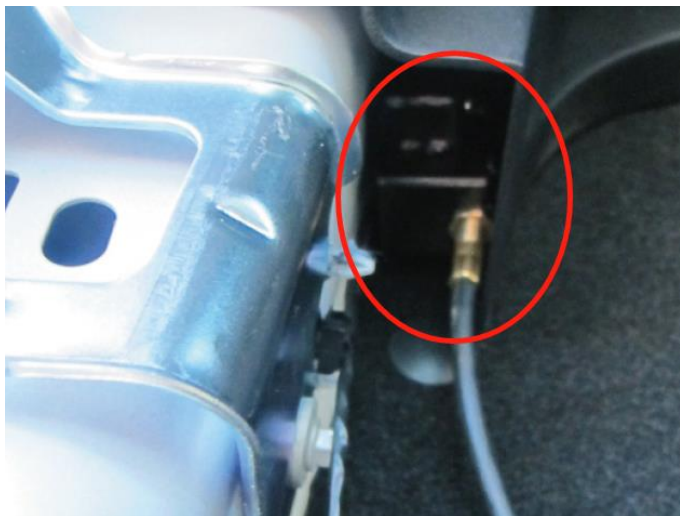

7. Route power cable to driver's dash, route power striker cable to rear door



8. Ground our GND wire to a screw in door panel



9. Locate lock connector behind original door latch, disconnect it and re-connect with our lock adapter in between





10. Locate original trunk switch connector, connect our loose blue wire from our rear button to original trunk switch signal which is also blue wire




11. Remove dashboard above kick panel



12. Locate factory fuse box, remove original 20A fuse, insert it to our fuse power plug

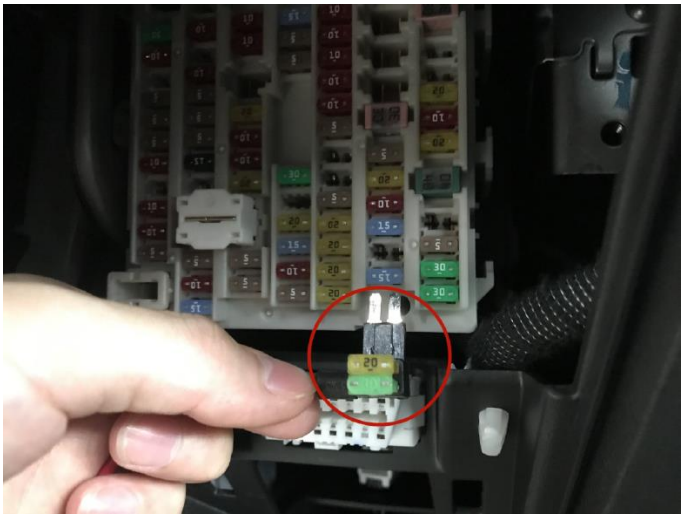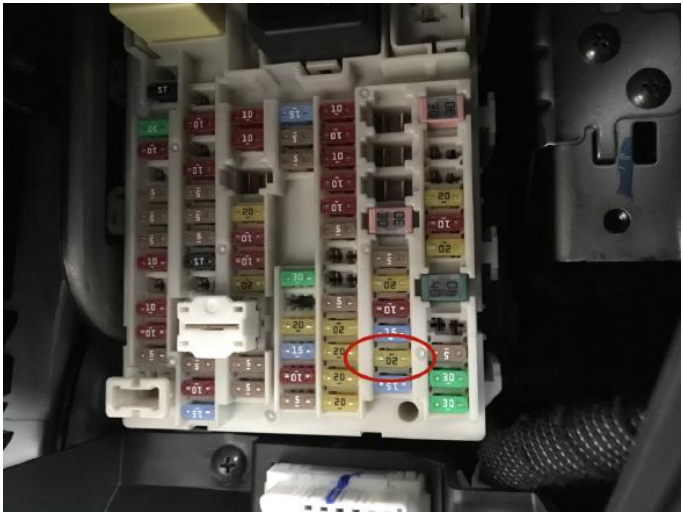


Then insert our power plug to original fuse port per picture

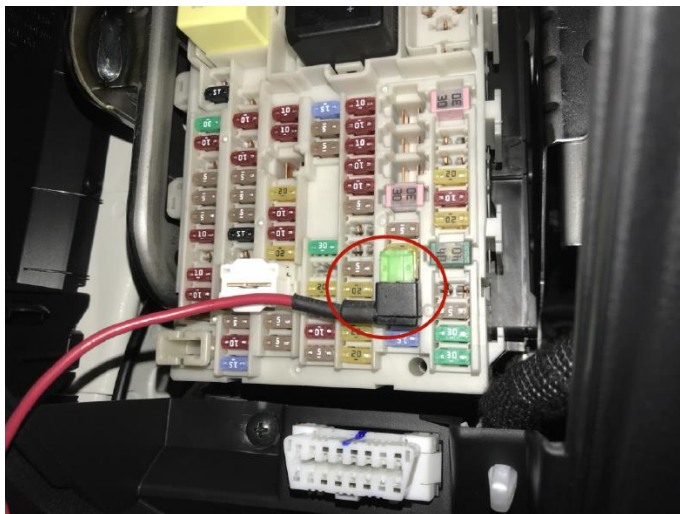

13. Replace original button holder in dashboard to our front button




14. Locate factory BCM behind fuse box, there is a gray 16pin plug as picture below. Connect our green wire to original green/lavender for remote control (3x unlock button). Original unlock signal is a positive voltage pulse when press unlock button

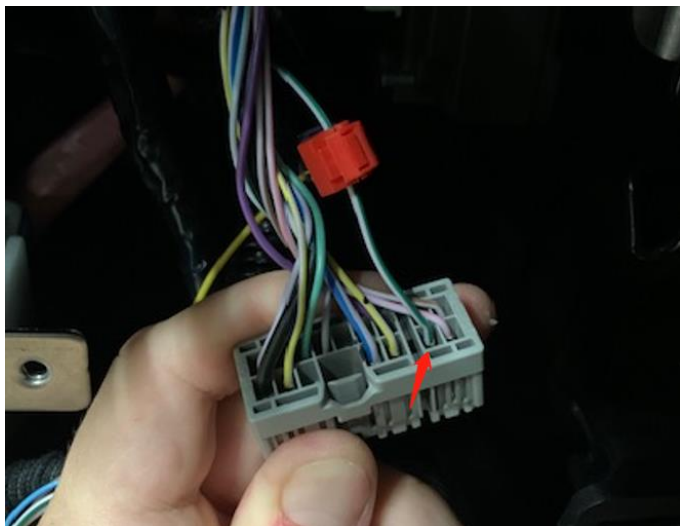

15. Drill a hole to install our rear button



16. Insert all the plugs into control box (ECU), leave power cable as the last one, you will hear a beep once power connected

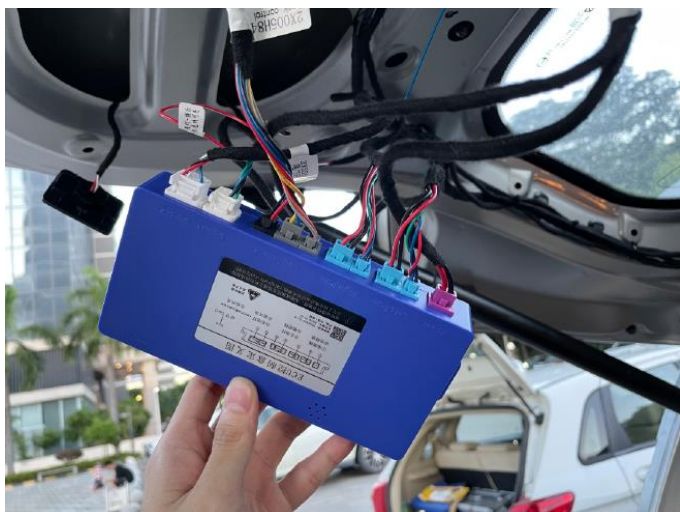

Place control box on door panel, fix with a sticker



17. Restore rear door panels, installation completed

Initialize system after installation - manually lift tailgate to a desired height, keep on pressing our rear button around 3 seconds until a beep is heard, short click our rear button to close, when door is fully closed and you hear a beep, it means the system is initialized and ready for use.

## FREQUENTLY ASKED QUESTIONS

### 1. How to operate the liftgate?

There are four methods as below:

- 1) Use original remote – 3x unlock
- 2) Use our rear button – 1x
- 3) Use our front button – long press
- 4) Use foot sensor – Sold separately

### 2. How to setup tailgate height?

Manually lift door to a desired height, long press our rear button until you hear a beep, done.

### 3. Why there are two beeps when door closing?

- 1) two beep means anti-pinch, check if anything is preventing strut/door movement
- 2) inspect power supply, include positive 12-16v, negative connects, and fuse box

### 4. Tailgate cannot be closed to the end and not locked

- 1) slightly adjust latch striker position i.e., increase/lower height
- 2) reverse left and right strut plugs in control box
- 3) check control box wiring
- 4) must using our screws in the box
- 5) remove rubber lock buffer block in the latch

### 5. Tailgate can only open to half of the height

- 1) reverse left and right strut plug in control box
- 2) reset tailgate height

### 6. Original remote/fob does not work

- 1) check our yellow wire connection to original unlock signal
- 2) check OBD connection if kit has a decoder box
- 3) adjust click rhythm
- 4) check OEM vehicle's system settings about unlock signal

7. Front button can open but not close the gate

1) check front button wires connection

2) check lock adapter (status) signal

3) update firmware